


HARMONY RAILING™ BALUSTER PLANNER

CONCRETE APPLICATIONS

WHEN POSTS ARE SECURED TO CONCRETE SUBSTRATES USE CONCRETE ANCHORS (SOLD SEPARATELY)

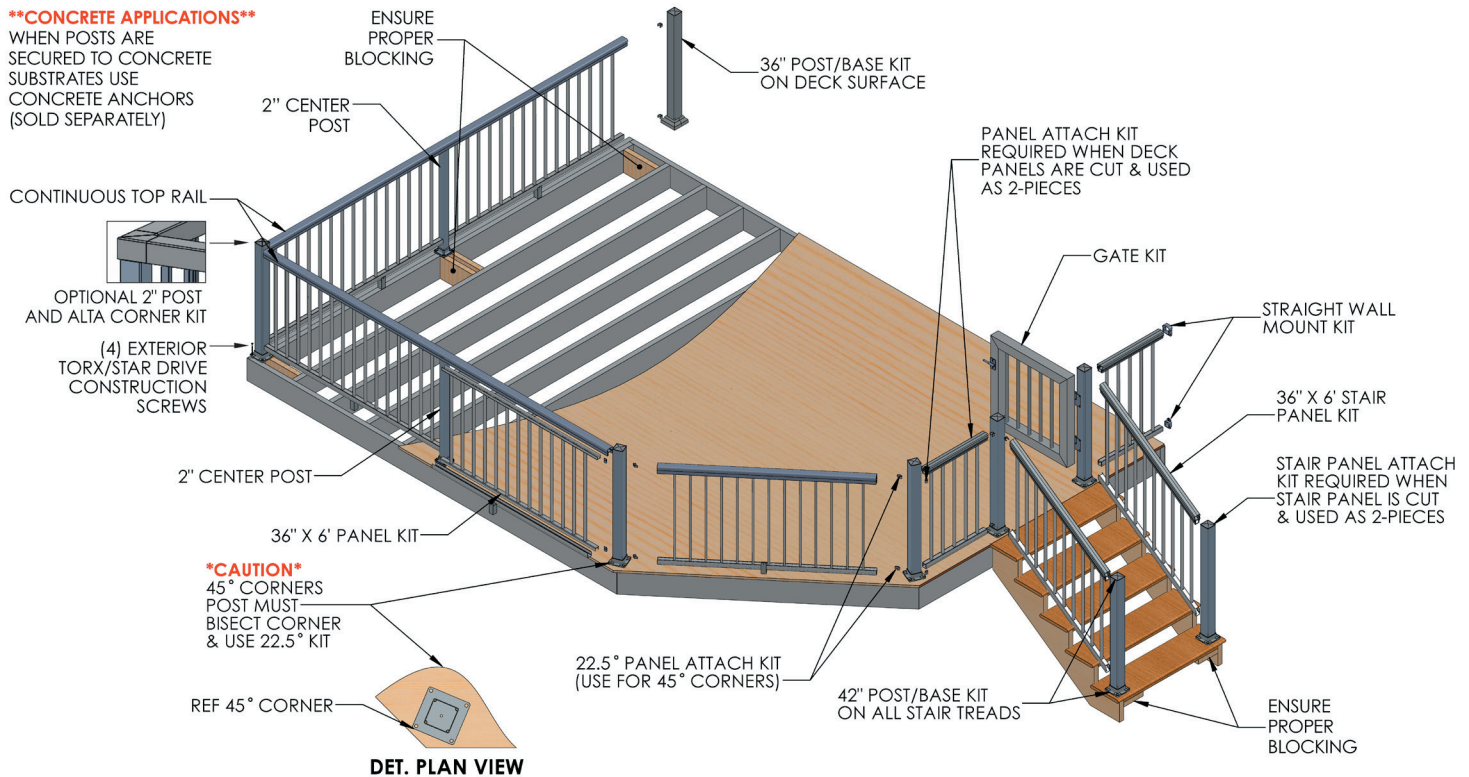

DET. PLAN VIEW

WHAT YOU WILL NEED	VICT. P/N	ALTA P/N	QTY
PREASSEMBLED ALUMINUM BALUSTER PANELS			
6' x 36" Baluster Panel (actual length 69.43")	HR362306	HR862306	
6' x 42" Baluster Panel (actual length 69.43")	HR362406	HR862406	
8' x 36" Baluster Panel (actual length 91.31")	HR362308	HR862308	
8' x 42" Baluster Panel (actual length 91.31")	HR362408	HR862408	
6' x 36" Continuous Rail (act. lgth 69.43")*	HR062306		
6' x 42" Continuous Rail (act. lgth 69.43")*	HR062406		
8' x 36" Continuous Rail (act. lgth 91.31")*	HR062308		
8' x 42" Continuous Rail (act. lgth 91.31")*	HR062408		
PREASSEMBLED ALUMINUM BALUSTER STAIR PANELS			
6' x 36" Stair Panel (actual length 69.43")	HS352306	HS852306	
8' x 36" Stair Panel (actual length 91.31")	HS352308	HS852308	
6' x 36" Continuous Stair Panel (69.43")*	HS052306		
6' x 42" Continuous Stair Panel (69.43")*	HS052406		
8' x 36" Continuous Stair Panel (91.31")*	HS052308		
8' x 42" Continuous Stair Panel (91.31")*	HS052408		

*Top rails sold separately with Continuous Rail and Continuous Stair Panels.

Part Number Plus Color Identifier: B=Black, W=White, Z=Bronze, M=Mahogany, O=Oak

Prior to construction, check with your local regulatory agency for special code requirements in your area. Common railing height is 36" or 42". Never span posts more than 8' on center for baluster railing systems and 6' on center for glass railing systems. Always ensure there is proper blocking under each post as per installation instructions. Read installation instructions and view installation videos to get a complete understanding of how the Harmony Railing™ products assemble.

Written installation instructions and videos can be found online at HarmonyRailing.com.

HELPFUL ORDERING INFORMATION:

- Baluster section kits include attachment clips and screws. If panels are cut and two pieces are used for installation, a separate attachment kit must be purchased.
- Anchors and fasteners to secure posts to concrete or wood are **NOT INCLUDED** in kits.
- Maximum post spacing on deck for baluster railing is 8' on center and glass railing is 6' on center.
- If using 1/4" tempered glass panel kit, glass panels must be purchased separately from a local glass company.

WHAT YOU WILL NEED	VICT. P/N	ALTA P/N	QTY
ALUMINUM POST KITS			
INCLUDES: POST AND BASE PLATE, POST CAP, AND POST BASE VINYL SKIRT.			
36" x 3" Post Kit (actual length 38.25")	HK441336		
42" x 3" Post Kit (actual length 43.5")	HK441342		
48" x 3" Post Kit (actual length 48")	HK441348		
36" x 2" Post Kit (actual length 34.06")	HK341236		
42" x 2" Post Kit (actual length 39.625")	HK341242		
48" x 2" Post Kit (actual length 48")	HK341248		
ADDITIONAL KITS			
Continuous Top Rail - 18' (B,W,Z)	VT393118	AL893118	
Wood Grain Continuous Top Rail - 18' (G,O)	VT393118	N/A	
Wood Grain Top Rail - 8' (G,O)	VT393108	N/A	
Deck & Stair Panel Attach Kit	HC39500		
22.5° Panel Attach Kit	HC06422		
45° Wall Mount Kit	HC06445		
Straight Wall Mount Kit	HC39100	HC89100	
Rail Clip Jig/Touch-Up Paint	HJ39700		
36" Gate Kit (adjustable up to 48" wide for 49" openings)	HG07518		
42" Gate Kit (adjustable up to 48" wide for 49" openings)	HG07520		

IMPORTANT NOTES:

- Actual baluster panel sizes: 6' Panels = 69.43"; 8' Panels = 91.31".
- 3" posts are required to reach 6' & 8' lengths.
- Stair railing panels are shipped at a 37° angle. Panels are adjustable and will accommodate 30-40° stair angles.
- CAUTION:** Over adjusting stair panels will cause loose and rattling balusters.
- 45° deck angles require 22.5° clips applied to each side of the post. The 22.5° clip kit is sold **SEPARATELY**.
- Using 2 Posts at top of stairs is recommended if compound angle cut is required.